
RESINPRINT COLOURSCREED

THE NEXT GENERATION OF DECORATIVE CONCRETE PRODUCTS!



- Low cost installation
- Twice the strength of normal concrete
- Interior and exterior use
- Can be stamped, stencilled or stained

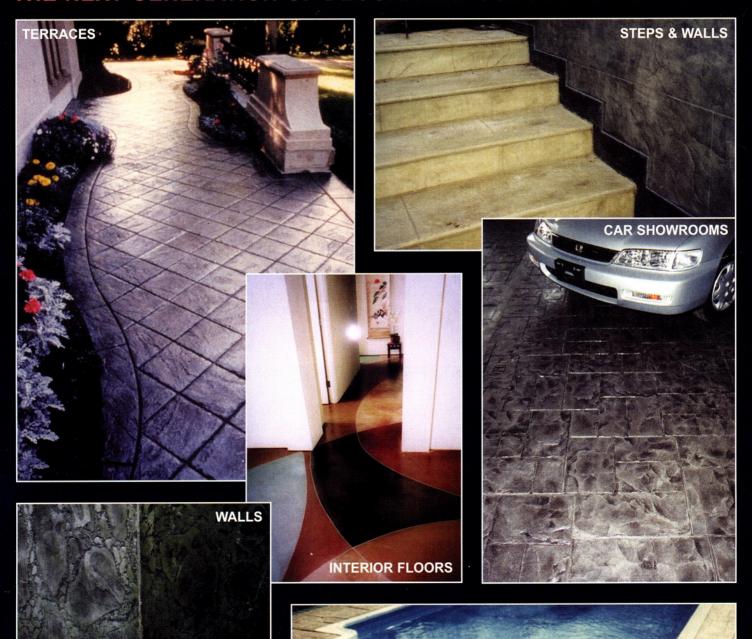

CREATIVE IMPRESSIONS LTD.

SWIMMING POOL SURROUNDS

UNIT 237, OLDFIELD ROAD, WALTON SUMMIT IND. PARK, PRESTON, LANCS., PR5 8AG, ENGLAND. TEL. 01772 335435 FAX. 01772 335434 Website: www.creative-impressions.com

E-mail: sales@creative-impressions.com

RESINPRINTTM COLOURSCREED

A WATER BASED POLYMER MODIFIED CEMENTITIOUS COMPOSITE MATERIAL DESIGNED FOR USE AS AN OVERLAY SCREED @ 10-20MM AND NOW AVAILABLE IN PRE-MIXED BAGS



ADVANTAGE RESINPRINT™

RESINPRINT™ – Colourscreed NEW formulation gives increased strength and abrasion resistant characteristics.

RESINPRINT™ – Colourscreed can be laid @ 10-20mm over a sound concrete surface.

RESINPRINT™ – Colourscreed overlay can be carried out at a fraction of the cost of removing and replacing the original concrete slab

RESINPRINT™ – Can be Stamped, Stencilled or Stained and can be rendered on walls and steps.

RESINPRINT™ COLOURSCREED - is a uniquely formulated pre-mix of Polymer, Cement, Pigment, Fibre and Graded Sands. Dry bagged and ready to use.

RESINPRINT™ COLOURSCREED

AVAILABILITY

In 25kg bag - in the full PERMACOLOUR colour range.

COVERAGE

25kg bag will cover 1/m² @ 15mm.

RESINPRINT BOND COAT PRIMER

AVAILABILITY

In 25kg bags.

COVERAGE

25kg bag will cover 10/m².

APPLICATION PROCEDURE

IMPORTANT TECHNICAL INFORMATION - The concrete area to be screeded should be sound and free from major surface deterioration. There should not be obvious signs of slab breakage and settlement. **RESINPRINT™ COLOURSCREED** cannot be screeded over loose laid slabs, block paving, tarmac or gravel. All expansion and control joints in the host concrete slab must be observed and the RESINPRINT screed must be jointed at the same location.

SURFACE PREPARATION - Clean the surface using Brick Acid and a high pressure power washer to remove any loose powder, friable laitence and oil. Any cracks should be cut back at least 15mm each side of the break and to a depth of 25mm, and repaired using our CAMCRETE High Strength fast setting repair mortar.

BOND COAT APPLICATION - add 25kgs of BOND COAT PRIMER to 6-7ltrs of cold clean water, using a forced action mixer (slow speed drill and paddle). Allow this slurry to stand for five minutes and then remix. Spray a "mist" of water to the concrete surface before applying a thin even coat of Bond Coat Primer to small 2–4m² areas at a time. The Bond Coat Primer must be wet to the touch when the RESINPRINT™ COLOURSCREED is applied. IF THE BOND COAT HAS DRIED OUT, A SECOND COAT MUST BE APPLIED BEFORE OVERLAYING CAN PROCEED. THE PERFORMANCE OF THIS BOND COAT IS CRITICAL TO THE SUCCESSFUL BONDING OF THE RESINPRINT SYSTEM TO THE EXISTING CONCRETE.

COLOURSCREED APPLICATION - mix 2 bags of **RESINPRINT™ COLOURSCREED** in a Belle type mixer with 5lts of cold clean water. Mix for 2-3 minutes then allow to stand for 5 minutes. Final mixing should then take place and when the screed reaches a soft buttery consistency, it should be poured. By tamping and trowelling, the screed is levelled and floated ready for texturing.

TEXTURING - **RESINPRINT™ COLOURSCREED** is suitable for both interior and exterior surfaces. It can be applied to steps, walls and most vertical stable surfaces. It can be textured using Texture Skins, Texture Mats or EZTools, and additional surface effects can be created with Acid Stain and Sand Blast Stencil. It is possible to create stunning decorative concrete surfaces only limited by the imagination of the user.

NOTICE: Creative Impressions Ltd only obligation shall be to replace such quantity of product proved to be defective. User shall determine the suitability in connection therewith. Since this product is used under conditions beyond the control of the distributor, neither the manufacturer or the distributor can assume any liability for the results obtained or damage incurred in excess of the purchase price of the above mentioned product @ Creative Impressions Ltd. 1992.